

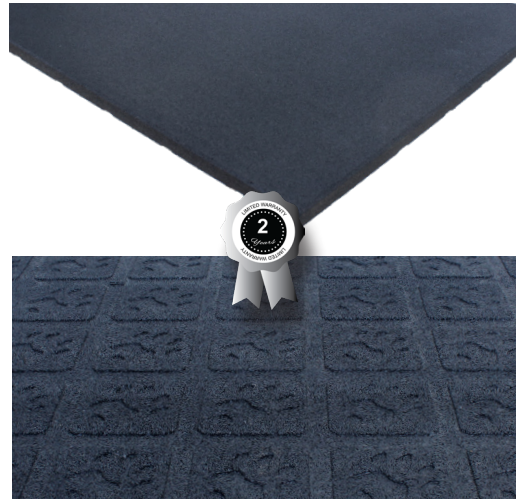


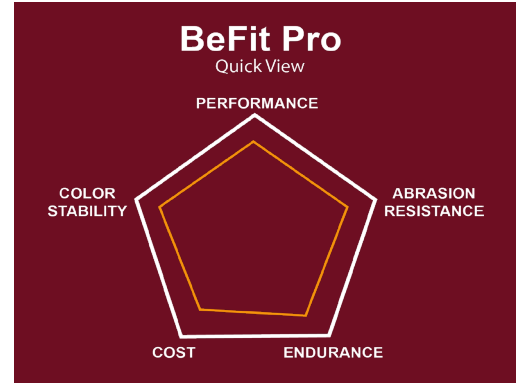

BsFit Pro

Our new **BsFit Pro** tiles, manufactured through our **COLD** process, set new standards for 100x100 indoor rubber tiles. Outstanding results combined with an affordable price for those seeking performance on a budget. Thanks to our **Cold process**, installing rubber tiles was never easier.

Why cold? Forget tolerance issues, enjoy a better abrasion resistance along with a softer surface and a better overall performance.

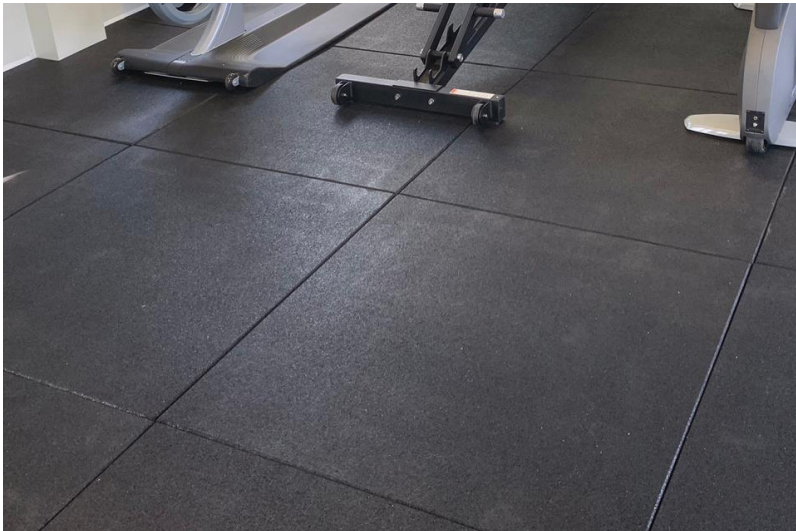

COMPOSITION

Recycled SBR Rubber, MDI polyurethane bonding agent

SPECIFICATIONS

Ideal for Fitness centers, personal training centers, Functional training centers, etc.

Usage	Indoor
Size	100 x 100 cm
Thickness	20mm / 25mm / 30mm
Color	■
Surface	Porous, soft, smooth
Density	950-980 kgs/m ³
Weight/m ²	18 kg (20 mm) / 23 kg (25 mm) / 27 kg (30 mm)
Hardness	60 ± 3 Shore A
Tolerance (Dimensions / Thickness)	0,05% / 0,05%

APPLICATION AREAS





Depending on the thickness selected, Indoor climbing wall areas, fitness facilities, Functional training centers, Personal Training Studios, Crossfit Boxes, etc.

THICKNESS

BeFit Pro	BeFit Pro	BeFit Pro
20 mm	25 mm	30 mm
Weights up to 100 - 120 kg used constantly. With 18 kg/m ² , these tiles protect your equipment and your sub-base flooring.	Areas where power lifting is involved, and a great deal of dropped weights around 120 - 160 kgs on a regular basis. This thickness offer higher cushion and more sound isolation.	Ideal for Professional Crossfit Boxes, where weights go easily over 150 kgs. Especially, for places where higher sound isolation is imperative, these 30 mm offer much better sound deadening.

CERTIFICATIONS

Fire Resistance	Dfl (B2)a,c (EN 13501)
Reaction to Fire	Fs <150 mm in 20 seconds (ISO 11925)
Impact Sound Insulation	26 dB (ISO 10140)
Airborne Sound Insulation	48 dB (ISO 10140)
Abrasion Resistance	0,43 gr (ISO 5470-1)

-  **High impact resistance**
-  **Superb acoustic isolation**
-  **Easy cleaning and maintenance**
-  **Superior performance**

The product data sheet is not subject to any change service!
All information is without guarantee.

You can find the latest version of this document on the relevant product page at www.bekarubber.com.